


ISOMAX 150 - 410 3 speed

TECHNICAL DATASHEET

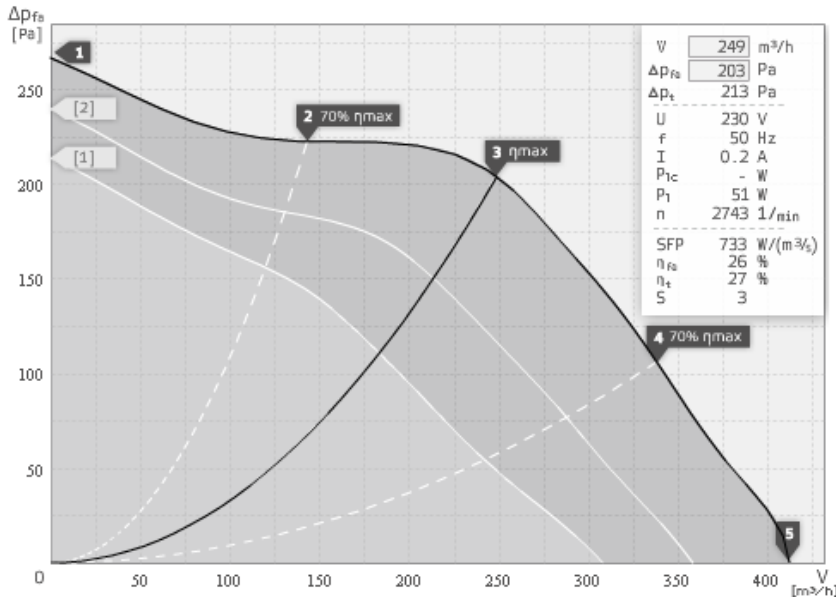

- ETALINE sound insulated
- Galvanized metal housing
- With 3-step switch
- Integrated thermal switch
- With mounting brackets for hanging

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power Consumption P1	W	43	46	51	51	50
RPM n	1/min	2831	2798	2743	2736	2757
SPL inlet LWA5	dB(A)	63	61	60	61	62
SPL outlet LWA6	dB(A)	63	62	60	62	64
SPL casing break out LWA2	dB(A)	50	50	49	51	51

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	60	27	37	51	50	59	49	47	36
Outlet	LWA6	59	28	41	56	54	54	43	41	36
Casing	LWA2	49	29	29	39	45	44	41	36	23

ELIX 150 E2S 01 123324	
Voltage UN	230 V 1~
Current Imax	0,2
Ambient Temperature tA	60 °C
Medium Temperature tM	60 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

